


# Copper Cable Lug Quick Reference Guide



## Copper Cable Lug Standard Sizes.

All our lugs are made from 99.9% seamless copper which is then tin-plated. Made to suit Australian & NZ standards.

The tables below and on the following page list all our standard sizes of Copper Cable Lugs. To quickly find any on our website, just search for the SWM part number listed. Alternatively, browse the full range at [swiftsupplies.com.au/cable-lugs/](http://swiftsupplies.com.au/cable-lugs/)

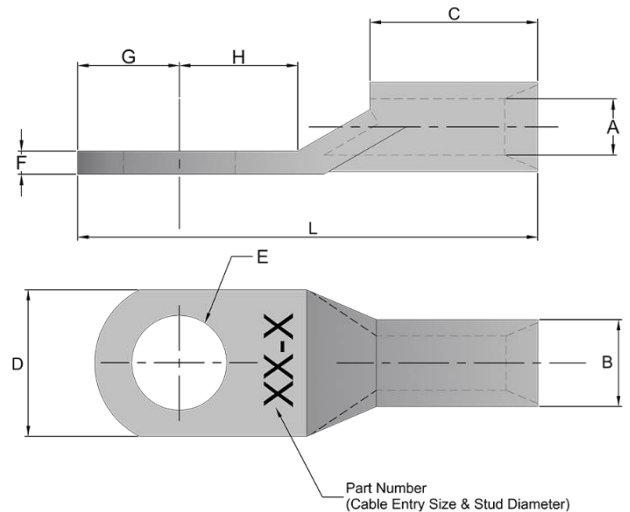

Part Number  
(Cable Entry Size & Stud Diameter)

Cable Size	Part #	Stud	A	B	C	D	E	F	G	H	L
1.5mm <sup>2</sup>	SWM000319B01V0001	5	1.8	3.7	7.5	8	5.2	1	4	5	16
1.5mm <sup>2</sup>	SWM000319B01V0002	6	1.8	3.7	7.5	10	6.5	0.8	4	6	16
2.5mm <sup>2</sup>	SWM000319B01V0003	4	2.4	4	8	8	4.2	1	4	5	18
2.5mm <sup>2</sup>	SWM000319B01V0004	5	2.4	4	8	10	5.2	0.8	5	6	20
2.5mm <sup>2</sup>	SWM000319B01V0005	6	2.4	4	8	10	6.5	0.8	5	6	20
2.5mm <sup>2</sup>	SWM000319B01V0006	8	2.4	4	8	11	8.4	0.7	6	9	26
4mm <sup>2</sup>	SWM000319B01V0007	5	3.1	4.8	9	10	5.2	1	5	6	20
4mm <sup>2</sup>	SWM000319B01V0008	6	3.1	4.8	9	10	6.5	1	5	6	20
4mm <sup>2</sup>	SWM000319B01V0009	8	3.1	4.8	9	12	8.4	0.8	6	9	26
6mm <sup>2</sup>	SWM000319B01V0010	5	3.8	5.5	10	10	5.2	1.2	5	6	23
6mm <sup>2</sup>	SWM000319B01V0011	6	3.8	5.5	10	12	6.5	1	6	9	27
6mm <sup>2</sup>	SWM000319B01V0012	8	3.8	5.5	10	12	8.4	1	6	9	28
6mm <sup>2</sup>	SWM000319B01V0013	10	3.8	5.5	10	15	10.2	0.8	8	11	32
10mm <sup>2</sup>	SWM000319B01V0014	5	4.7	7.1	10	12	5.2	1.8	6	7	27
10mm <sup>2</sup>	SWM000319B01V0015	6	4.7	7.1	10	12	6.5	1.8	6	7	27
10mm <sup>2</sup>	SWM000319B01V0016	8	4.7	7.1	10	14	8.4	1.6	7	8	29
10mm <sup>2</sup>	SWM000319B01V0017	10	4.7	7.1	10	15	10.5	1.5	8	10	32
10mm <sup>2</sup>	SWM000319B01V0018	12	4.7	7.1	10	18	13	1	10	12	38
16mm <sup>2</sup>	SWM000319B01V0019	6	5.5	7.9	19	11	6.5	2.4	7	9	39
16mm <sup>2</sup>	SWM000319B01V0020	8	5.5	7.9	19	14	8.4	1.7	7	9	39
16mm <sup>2</sup>	SWM000319B01V0021	10	5.5	7.9	19	16	10.5	1.5	8	10	41
16mm <sup>2</sup>	SWM000319B01V0022	12	5.5	7.9	19	18	13	1.2	10	13	46
25mm <sup>2</sup>	SWM000319B01V0023	6	7.1	9.5	21	13.5	6.5	2.4	7	9	41
25mm <sup>2</sup>	SWM000319B01V0024	8	7.1	9.5	21	13.5	8.4	2.4	7	9	41
25mm <sup>2</sup>	SWM000319B01V0025	10	7.1	9.5	21	16	10.5	1.9	9	10	44
25mm <sup>2</sup>	SWM000319B01V0026	12	7.1	9.5	21	18	13	1.6	10	13	48
35mm <sup>2</sup>	SWM000319B01V0027	6	8.4	11.5	21	16	6.5	3	9	10	45
35mm <sup>2</sup>	SWM000319B01V0028	8	8.4	11.5	21	16	8.4	3	9	10	45
35mm <sup>2</sup>	SWM000319B01V0029	10	8.4	11.5	21	18	10.5	2.6	9	10	45
35mm <sup>2</sup>	SWM000319B01V0030	12	8.4	11.5	22	20	13	2.2	11	13	51

All dimensions given in mm. More sizes on the next page.

## Copper Cable Lug Standard Sizes.

The tables below and on the previous page list all our standard sizes of Copper Cable Lugs. To quickly find any on our website, just search for the SWM part number listed. Alternatively, browse the full range at [swiftsupplies.com.au/cable-lugs/](http://swiftsupplies.com.au/cable-lugs/)

Cable Size	Part #	Stud	A	B	C	D	E	F	G	H	L
50mm <sup>2</sup>	SWM000319B01V0031	6	9.5	12.8	22	18	6.5	3.3	8	10	46
50mm <sup>2</sup>	SWM000319B01V0032	8	9.5	12.8	22	18	8.4	3.3	8	10	46
50mm <sup>2</sup>	SWM000319B01V0033	10	9.5	12.8	22	18	10.5	3.3	8	10	46
50mm <sup>2</sup>	SWM000319B01V0034	12	9.5	12.8	22	21	13	2.7	11	13	54
70mm <sup>2</sup>	SWM000319B01V0035	6	11.3	14.6	22	21	6.5	3.5	11	13	54
70mm <sup>2</sup>	SWM000319B01V0036	8	11.3	14.6	24	21	8.4	3.5	11	13	54
70mm <sup>2</sup>	SWM000319B01V0037	10	11.3	14.6	24	21	10.5	3.5	11	13	54
70mm <sup>2</sup>	SWM000319B01V0038	12	11.3	14.6	24	21	13	3.5	11	13	54
70mm <sup>2</sup>	SWM000319B01V0039	16	11.3	14.6	24	26	17	3	14	13	61
95mm <sup>2</sup>	SWM000319B01V0040	8	13.5	17.4	27	25	8.4	4	12	14	60
95mm <sup>2</sup>	SWM000319B01V0041	10	13.5	17.4	27	25	10.5	4	12	14	60
95mm <sup>2</sup>	SWM000319B01V0042	12	13.5	17.4	27	25	13	4	12	14	60
95mm <sup>2</sup>	SWM000319B01V0043	16	13.5	17.4	27	25	17	3.5	14	16	64
120mm <sup>2</sup>	SWM000319B01V0044	8	15.6	20.6	30	30	8.4	5	12	14	64
120mm <sup>2</sup>	SWM000319B01V0045	10	15.6	20.6	30	30	10.5	5	12	14	64
120mm <sup>2</sup>	SWM000319B01V0046	12	15.6	20.6	30	30	13	5	12	14	64
120mm <sup>2</sup>	SWM000319B01V0047	16	15.6	20.6	30	30	17	5	16	16	72
150mm <sup>2</sup>	SWM000319B01V0048	10	16.7	22.2	30	32	10.5	5.8	16	16	71
150mm <sup>2</sup>	SWM000319B01V0049	12	16.7	22.2	32	32	13	5.8	18	18	75
150mm <sup>2</sup>	SWM000319B01V0050	16	16.7	22.2	30	32	17	5.8	18	18	75
185mm <sup>2</sup>	SWM000319B01V0051	10	18.4	24.2	32	36	10.5	5.8	16	16	74
185mm <sup>2</sup>	SWM000319B01V0052	12	18.4	24.2	32	36	13	5.8	18	18	79
185mm <sup>2</sup>	SWM000319B01V0053	16	18.4	24.2	32	36	17	5.8	18	18	79
240mm <sup>2</sup>	SWM000319B01V0054	10	21.2	28.5	38	41	10.5	7	21	21	92
240mm <sup>2</sup>	SWM000319B01V0055	12	21.2	28.5	38	41	13	7	21	21	92
240mm <sup>2</sup>	SWM000319B01V0056	16	21.2	28.5	38	41	17	7	21	21	92
300mm <sup>2</sup>	SWM000319B01V0057	12	23.8	31.9	42	46	13	7.8	23	23	101

All dimensions given in mm. More sizes on the previous page.

